



ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chișinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md



SOLAR



• 400 KG BASKET PAYLOAD

• 15 M WORKING HEIGHT (UNTIL 6 M WITHOUT STABILISATION)

• ALSO & DRIVE FUNCTION FROM THE BASKET WITH STEERING OPTION


• MOVE OUTREACH AND BASKET WITH DOUBLE LATERAL MOVEMENT 90° + 90° ROTATION

• 3.5 M SHAPE STABILIZERS (H+H) FOR MINIMAL ROAD OBSTRUCTION

Area di lavoro | Working diagram

- Diagramme de travail | Arbeitsbereich
- Área de trabajo | Рабочая область

TRUCK MIN GVW 3,5 TON

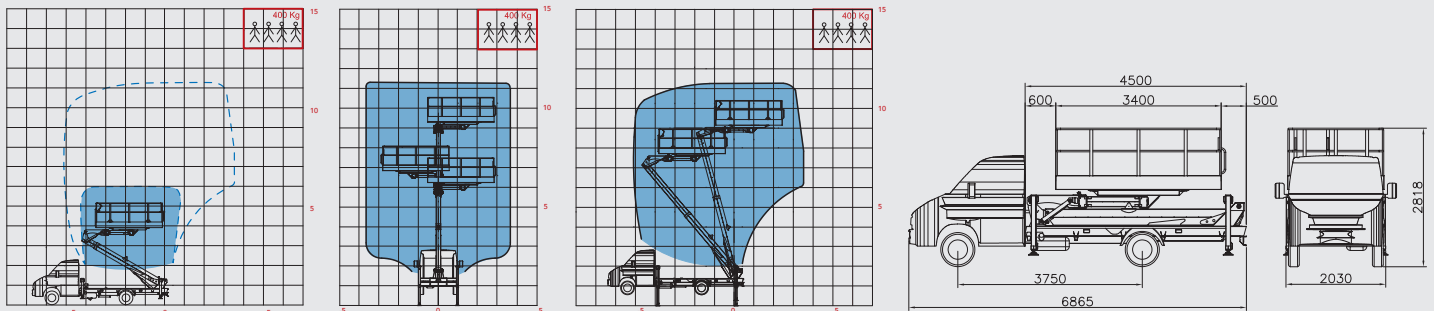

SOLAR SU TRUCK MIN PTT 5 TON

- Altezza di lavoro: 15 m
- Sbraccio laterale costante: 3.5 m
- Portata navicella: 400 kg costanti senza limitazione (anche senza stabilizzatori) con cella di carico.
- Misure navicella: 3.5 m x 2.0 m
- Doppio movimento della navicella: traslazione laterale e rotazione 90° + 90°
- 4 stabilizzatori in sagoma (H+H)
- Livellamento automatico della navicella in tutte le situazioni di pendenza. Il basket rimane sempre perfettamente a livello rispetto al terreno.
- Possibilità di traslazione del veicolo con comando dalla navicella per lavori continui senza stabilizzatori e home function.
- Possibilità di lavoro con pendenze vicine agli 10°
- Ideale per lavori speciali come in galleria, per il defrost degli aerei e i pannelli solari.



SOLAR ON TRUCK MIN GVW 5 TON

- Max working height: 15 m
- Lateral constant outreach: 3.5m
- Basket capacity: 400 kg without limitation (also without stabilisation)
- Basket size: 3.5 m x 2.0 m
- Basket with double lateral movement 90° + 90° rotation
- 4 stabilizers in shape (H+H)
- Self-levelling system in every working position, for the basket to always remain perfectly aligned compared to the soil.
- Self-propelled version and steering system option of the vehicle with basket control and home function.
- Operational on slopes up to 10°
- Ideal for works in tunnels, plane defrosting, installation of solar panels and much more.