

# P3500i/o

## Compact & Lightweight



POWERRUSH MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. POWERRUSH increases electrical current upon demand, above rated output when starting electric motors.

### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box



### POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	3300
Rated Power	watt	3000



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

## Engine


Engine Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.6
Low Oil Shutdown		✓

## Alternator

Voltage regulation system		Inverter
---------------------------	--	----------

## Dimensional data

Length	(L) mm	490
Width	(W) mm	430
Height	(H) mm	417
Dry weight	kg	34
Carton box dimension LxWxH	mm	505x445x455

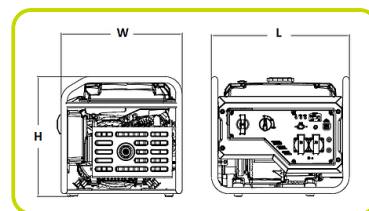

## Autonomy

Fuel tank capacity		9
Fuel consumption 75%	l/h	1.6
Running time 75%	h	5.5



## Noise level

Guaranteed noise level (LWA)	dB(A)	96
Noise pressure level @ 7 m	dB(A)	66

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I | Air choke Valve | Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Hourmeter / Fuel gauge
- Parallel kit receptacles

### PROTECTIONS

- Overload; Oil Guard; Short Circuit; Overvoltage; Overtemperature
- Protection Control panel IP 44

### OUTPUT:

- n°2 USB DC 5V 2A

### SOCKET TYPE

SCHUKO 230V 16A IP44		2
----------------------	--	---



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chișinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

## ACCESSORIES CONTROL PANEL

### PARALLEL KIT

The Pramac Parallel Kit allows you to double your power when pairing two inverter generators together with the same output\*. By connecting two Inverter to one Parallel kit, customers can meet higher output requirements, powering multiple appliances at the same time for a total output of up to two times the rated power output of each individual Inverter.

### TECHNICAL DATA

Nominal Tension: 230 V  
Frequency: 50 Hz  
Phases: 1  
Rated Current: 30 A  
IP protection: 30

### CONTROL PANEL


1 x Schuko 16A (IP44)  
1 x CEE 32A (IP44)

**CABLES LENGTH:** 450 mm

\*Important: Applies when pairing two inverter generators with the same output.  
Parallel kit sold separately.

### DIMENSIONS PANEL

Width	(W) mm	250
Height	(H) mm	217
Depth	(D) mm	160
Weight	kg	1.5

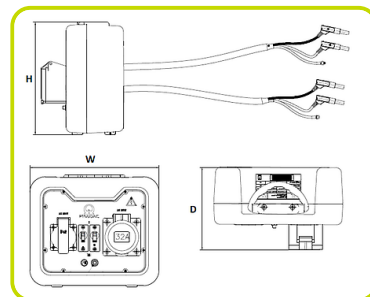

**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chișinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md