

# SP8000 IP54

## THE COMPLETE PETROL PACKAGE



A robust generator with all the features of a top class product: a powerful and economic engine, a strong and modern design and a long-run easy filling fuel tank. Perfect for intensive use, it's equipped with a control panel which allows to integrate many accessories and options for better comfort and for optimal command. Ready to move where power is needed, and configured with a strong and compact frame with integrated handle and wheels, that allow to transport it easily. Panel and alternator featuring IP54.

### Main Features

Frequency	Hz	50
Voltage	V	400/230
Power factor	cos $\phi$	0.8
Phase		3

### Power Rating

Emergency Standby Power ESP	kVA	8.8
Emergency Standby Power ESP	kW	7.1
Continuous power COP	kVA	6.8
Continuous power COP	kW	5.4

### Single Phase Power Rating

Single phase Maximum Power	kVA	5.8
Single phase continuous power COP	kVA	4.0

Ratings definition (According to standard ISO8528 1:2005)



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

### Engine specifications

Engine Brand		Honda
Model		GX390 Electric
Engine cooling system		Air
Displacement	cm <sup>3</sup>	389
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Electric (+Recoil)

### Alternator Specifications

Alternator		KWG
Type		Brushless
Class		H
IP protection		54
Poles		2
Frequency	Hz	50
Voltage	V	400
Voltage regulation system		Electronic

### Dimensional data

Length	(L) mm	840
Width	(W) mm	615
Height	(H) mm	753
Dry weight	kg	116
Fuel tank capacity	l	27

### Autonomy

Fuel consumption at 75% of Load	l/h	2.15
Fuel consumption at 100% of Load	l/h	2.87
Running time at 75% of load	h	12.56
Running time at 100% of load	h	9.41

### Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

## Genset equipment

Innovative, compact design, equipped with components and special parts to meet professional applications:

### Basic Structure:

- Tubular steel bearing and protective frame (roll bar)
- Lateral protective sheet steel covers (removable and with appropriate openings for an easier ordinary maintenance).



### Fuel Tank:

- Increased tank capacity (standard autonomy much higher than average)
- Fuel level indicator (analog)
- Bayonet Fuel Filler Cap
- Pre-filter fuelling cup-shape
- Fuel tap (located on the frontal control panel)
- In-line fuel filter



### Engine:

- Anti vibration properly sized mounts
- Starter battery incorporated in the structure
- Exhaust Residential muffler with spark arrestor protection
- Low oil level protection (oil guard)




### Transportation:

- Integrated transport kit consisting of two solid rubber wheels and a non-slip rubber foldaway handle.
- 2 lifting points on the upper part of the frame.



### Instructions:

- Practical quick user's instructions leaflet on the front panel – to make starting your generator even easier and safer – (ideal for rental)

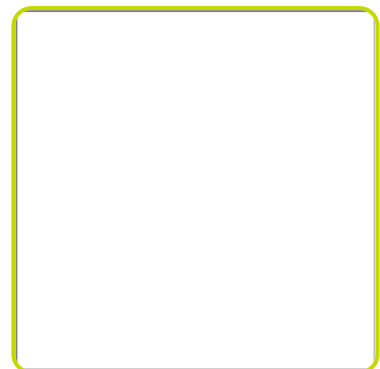

### Protections Complete:

- Panel and alternator featuring IP54 protection
- Insulations monitoring (IPP)
- Automatic Voltage Regulator (AVR)



## GENSET CONTROL PANELS IP54 (IPP)

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS:

- Start selector switch with key: OFF - ON - START
- Pushbutton Choke

### INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

### PROTECTIONS:

- Thermal Circuit Breaker
- Isometer Protection (IPP)
- Cover Power Switch (IP55)
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP54	2
3P+N+T CEE 400V 16A IP67	1

