

WX 6200 ES



Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



PERFORMANCE

| | | |
|-------------|------|------|
| Frequency | Hz | 50 |
| Voltage | V | 230 |
| Phase | | 1 |
| Max Power | watt | 5800 |
| Rated Power | watt | 5300 |



ETOP
creat să reziste


Republica Moldova, MD-2023
mun. Chişinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

| Engine | | |
|-------------------------|-----|--------------------|
| Brand | | Pramac |
| Type | | OHV |
| Exhaust emission level | | Stage V |
| Operating Speed Nominal | rpm | 3000 |
| Fuel | | Petrol |
| Starting Systems | | Electric (+Recoil) |
| Oil capacity | l | 1.1 |
| Low Oil Shutdown | | ✓ |



| Alternator | | |
|---------------------------|--|-----|
| Voltage regulation system | | AVR |

| Dimensional data | | |
|----------------------------|--------|-------------|
| Length | (L) mm | 800 |
| Width | (W) mm | 698 |
| Height | (H) mm | 620 |
| Dry weight | kg | 89 |
| Carton box dimension LxWxH | mm | 810x625x607 |

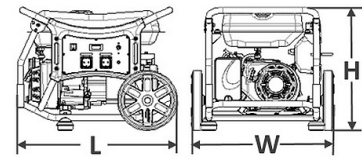

| Autonomy | | |
|----------------------|-----|------|
| Fuel tank capacity | | 26 |
| Fuel consumption 50% | l/h | 2.17 |
| Running time 50% | h | 12 |



| Noise level | | |
|------------------------------|-------|----|
| Guaranteed noise level (LWA) | dB(A) | 97 |
| Noise pressure level @ 7 m | dB(A) | 69 |

GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS

- Selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

PROTECTIONS

- Thermal protection
- Oil Guard

SOCKET TYPE

| | |
|------------------------|---|
| SCHUKO 230V 16A IP44 | 2 |
| 2P+T CEE 230V 32A IP44 | 1 |



ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chișinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md