

## PMi 2500



Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise.



### PERFORMANCE


Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	2300
Rated Power	watt	2000



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

Engine		
Brand		Pramac
Type		OHC
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.4
Low Oil Shutdown		✓

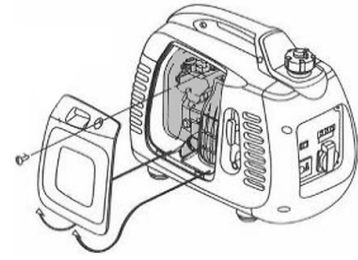

Alternator	
Voltage regulation system	Inverter

Dimensional data		
Length	(L) mm	535
Width	(W) mm	290
Height	(H) mm	440
Dry weight	kg	22.5
Carton box dimension LxWxH	mm	555x305x460



Autonomy		
Fuel tank capacity		3.5
Fuel consumption 50%	l/h	0.9
Running time 50%	h	3.6



Noise level		
Guaranteed noise level (LWA)	dB(A)	93
Noise pressure level @ 7 m	dB(A)	67.7

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Voltmeter, Frequency meter, Wattmeter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

### PROTECTIONS

- Overload
- Oil Guard

### OUTPUT:

- DC12V 6A
- n°2 USB 5V 2A

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
----------------------	---



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md