

Electric towing tractor 10.0 ton



Simai

Three wheel-series

TTE100



Electric towing tractor 10.0 ton

Truck specifications					TTE100
Identification	1.1	Manufacturer			Simai S.p.A
	1.2	Model			TTE100
	1.3	Drive			Electric
	1.4	Operator type			Sit-on
	1.5	Load capacity/rated load	Q	kg	10 000
	1.7	Rated drawbar pull	F	N	2200
	1.9	Wheelbase	y	mm	1264
Weight	2.1	Service weight		kg	1370
	2.2	Axle load, with load, front/rear		kg	-
	2.3	Axle load, without load, front/rear		kg	585/785
Tyres	3.1	Tyre - Cushion(Cu), Superelastic(SE), Pneumatic(Pn), Polyurethane			SE/Pn
	3.2	Tyre - size, front			4.00-8
	3.3	Tyre - size, rear			18x7-8
	3.5	Wheels, number front/rear (x = driven wheels)			1/2X
	3.6	Track width, front	b_{10}	mm	-
	3.7	Track width, rear	b_{11}	mm	934
Dimensions	4.7	Height of cab	h_6	mm	-
	4.8	Seat height	h_7	mm	880
	4.12	Coupling height	h_{10}	mm	245-300-355
	4.13	Loading height, unloaded	h_{11}	mm	580
	4.16	Length of loading surface	l_3	mm	650
	4.17	Overhang	l_5	mm	371
	4.18	Width of loading surface	b_9	mm	900
	4.19	Overall length	l_1	mm	1996
	4.21	Overall width	b_1	mm	1090
	4.32	Ground clearance, centre of wheelbase	m_2	mm	105
	4.35	Turning radius	W_a	mm	2077/1495
4.36	Internal turning radius	b_{13}	mm	919	
Performance data	5.1	Travel speed, with/without load		km/h	8,5/18
	5.6	Max. drawbar pull		N	8000
	5.7	Gradeability		%	4/35
	5.8	Max. gradeability loaded/unloaded		%	
	5.10	Service / parking brake (I=Hydraulic E=Electromagnetic M=Mechanical)			I/E
Electric motor	6.1	Drive motor rating S2 60 min		kW	2x6,6
	6.4	Battery voltage, nominal capacity ¹⁾	K_5	V/Ah	48/420, 460, 500
	6.5	Battery weight		kg	667 - 700 - 731
	6.6	Energy consumption according to VDI cycle ²⁾		kWh/h	
Others	8.1	Electronics control			Inverter AC
	8.4	Sound level at driver's ear according to EN 12053		dB(A)	69

¹⁾ Performances and weight are intended with 500 Ah battery.

²⁾ Contact the supplier for information.


As per VDI guidelines 2198, this datasheet applies to standard electric tractor / platform truck only.

Dimensions are not binding and can be changed in any moment. The performances must be intended for brand new machines, after having completed the running-in tested in San Donato Milanese factory in normal climatic conditions.

Performances and weight are to be intended with standard motors and battery and with superelastic tires.

Some data can vary according to different equipments.

Dimensional drawings

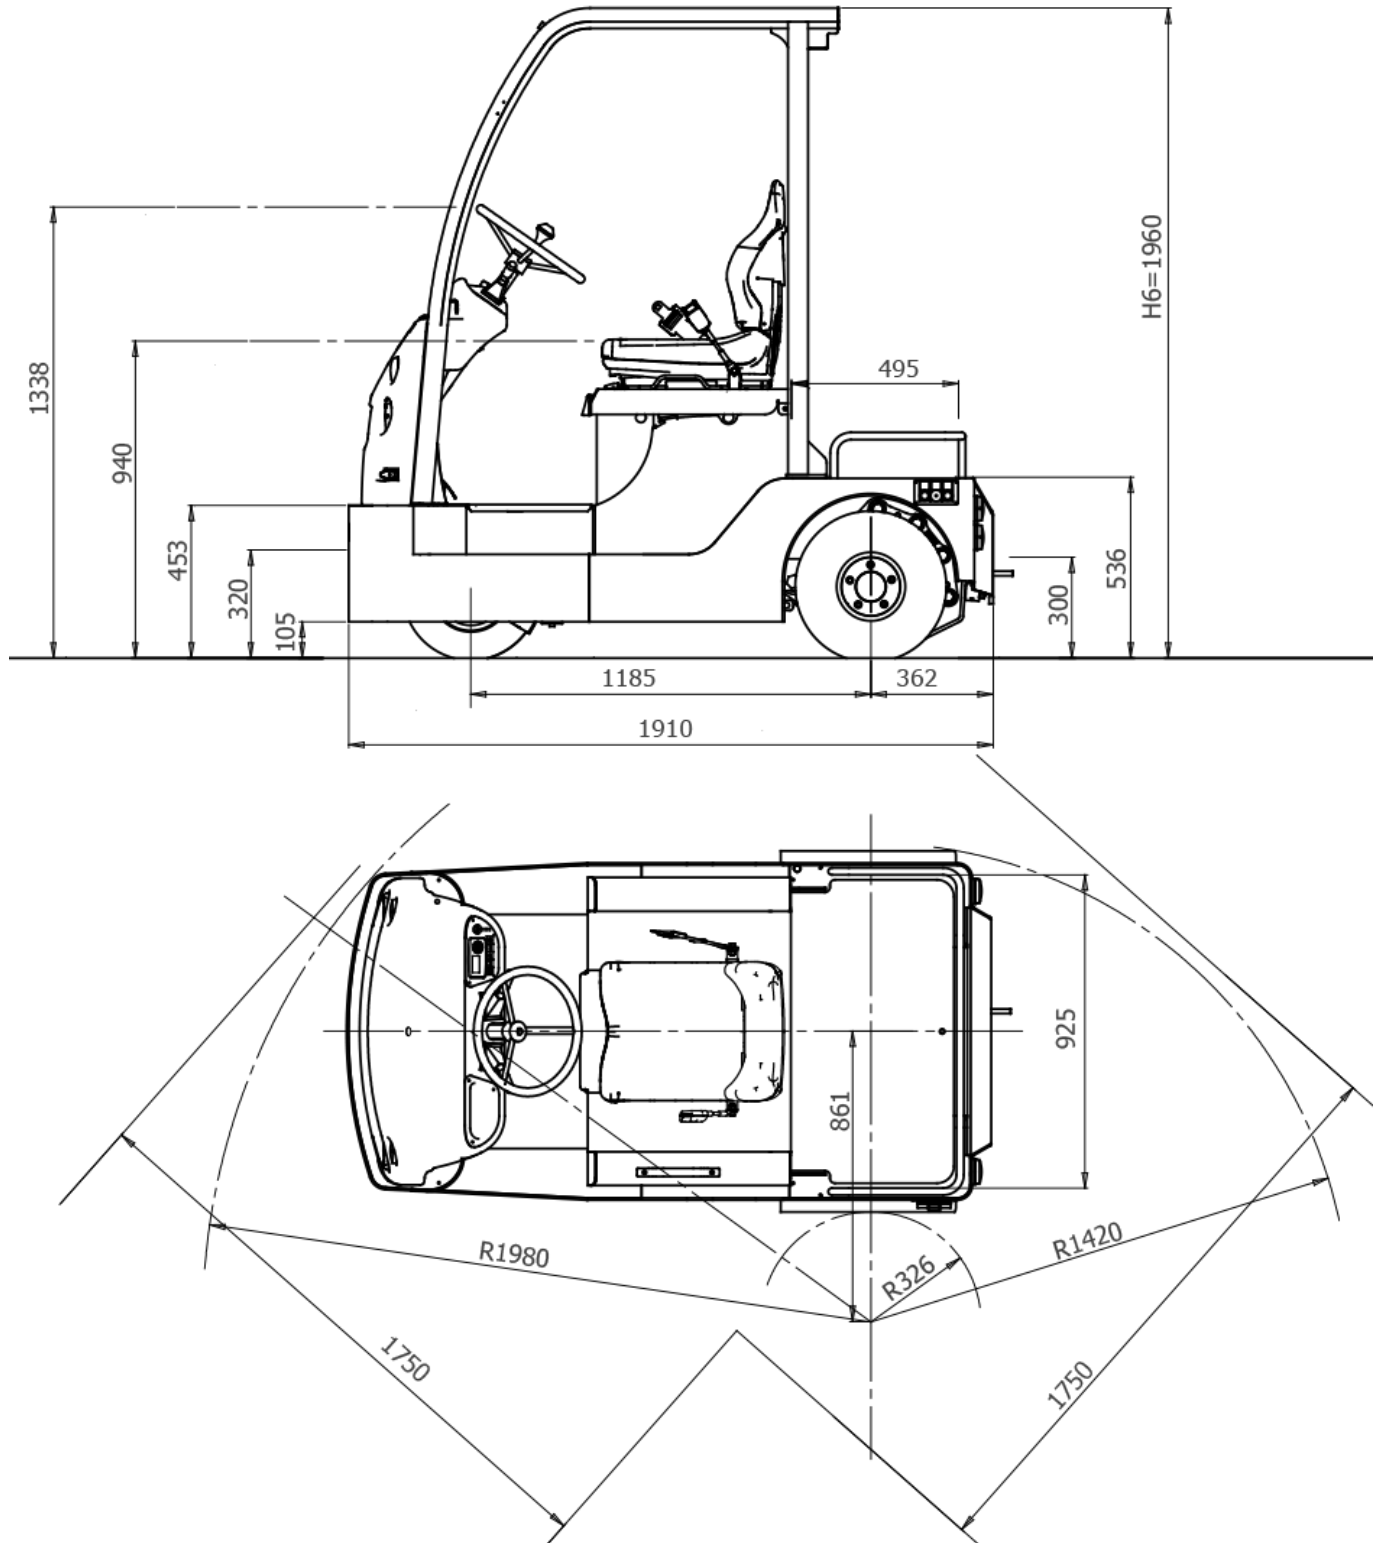

Standard equipments:

- Inching buttons
- Electric steering
- AC power system
- Automatic speed reduction when turning
- Rear drawbar
- Automatic parking brake
- Load platform with 100 kg capacity
- Head and tail lights, turn signal lights
- Digital dashboard including battery charge level pilot, trouble shooting check system, speedometer and hourcounter



ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chișinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

TOYOTA

MATERIAL HANDLING