

MP56-3

MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Technical Data

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	26
Delivery Volume	l/min	930

Performance curve

Graph

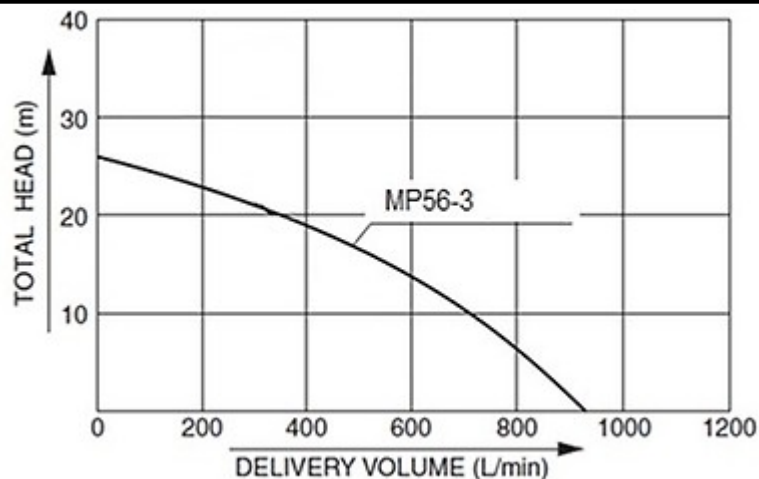

ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chişinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

Engine specifications

Engine Brand	Honda	
Nr. of cylinder and disposition	1 inclination angle	
Displacement	cm ³	163
Fuel	Petrol	
Starting system	Recoil	



Pump specifications

Manufacturer	KOSHIN	
Inlet pipe diameter	'	3
Outlet pipe diameter	'	3
Max Solid Size	mm	-
Material for mechanical seal	Carbon Ceramic	
Material for impeller	Cast Iron	
Material for volute	Aluminum Die Cast	

Dimensional data

Length	(L) mm	477
Width	(W) mm	416
Height	(H) mm	466
Dry weight	kg	28

Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dB(A)	80
Guaranteed noise level (LWA)	dB(A)	105



ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chișinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m		3"
Inlet pipes - length 25m		3"
Outlet pipes - length 10m		3"
Outlet pipes - length 50m		3"
Outlet pipes - length 100m		3"

