

# MP34-2

## MOTOR PUMPS - FOR TRASH WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

### Main Technical Data

Type		Trash
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	700

### Performance curve

Graph

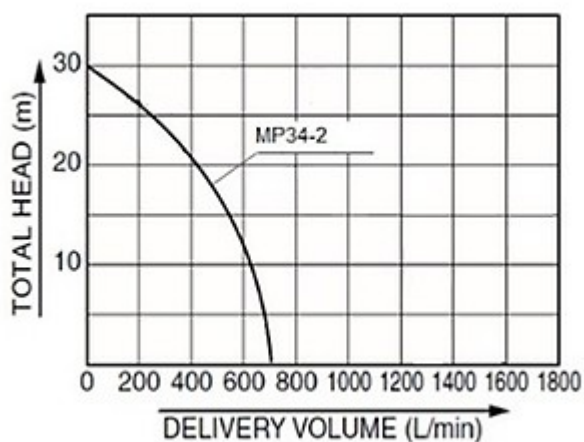

**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

### Engine specifications

Engine Brand	Honda	
Nr. of cylinder and disposition	1 inclination angle	
Displacement	cm <sup>3</sup>	163
Fuel	Petrol	
Starting system	Recoil	



### Pump specifications

Manufacturer	KOSHIN	
Inlet pipe diameter	'	2
Outlet pipe diameter	'	2
Max Solid Size	mm	20
Material for mechanical seal	SiC	
Material for impeller	Hi-Crome	
Material for volute	Cast Iron	



### Dimensional data

Length	(L) mm	620
Width	(W) mm	462
Height	(H) mm	481
Dry weight	kg	47

### Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dB(A)	78
Guaranteed noise level (LWA)	dB(A)	106



### General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Special Tool for pump		Standard
Spark plug tool		Standard
Oil guard		Standard



### Accessories

Inlet pipes - length 8m		2"
Inlet pipes - length 25m		2"
Outlet pipes - length 10m		2"
Outlet pipes - length 50m		2"
Outlet pipes - length 100m		2"

