

MP66-3

MOTOR PUMPS - FOR TRASH WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Technical Data

Type		Trash
Max suction head	m	8
Max Delivery Head	m	27
Delivery Volume	l/min	1340

Performance curve

Graph

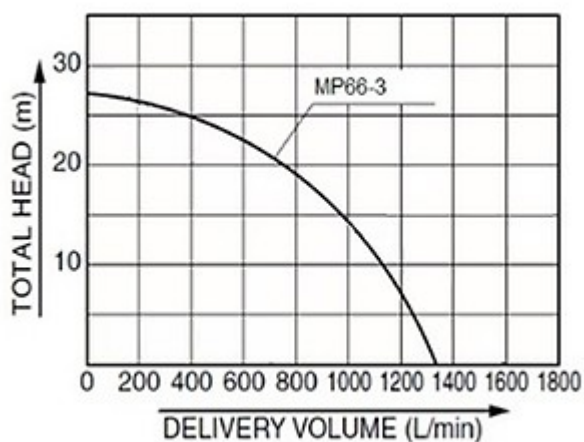

ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chişinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

Engine specifications

Engine Brand	Honda	
Nr. of cylinder and disposition	1 inclination angle	
Displacement	cm ³	242
Fuel	Petrol	
Starting system	Recoil	



Pump specifications

Manufacturer	KOSHIN	
Inlet pipe diameter	'	3
Outlet pipe diameter	'	3
Max Solid Size	mm	27
Material for mechanical seal	SiC	
Material for impeller	Hi-Crome	
Material for volute	Cast Iron	



Dimensional data

Length	(L) mm	690
Width	(W) mm	485
Height	(H) mm	537
Dry weight	kg	59

Consumption, running time and noise

Fuel tank capacity	l	5.3
Running time	h	2.4
Noise level at 7 m	dB(A)	83
Guaranteed noise level (LWA)	dB(A)	110



General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Special Tool for pump		Standard
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m		3"
Inlet pipes - length 25m		3"
Outlet pipes - length 10m		3"
Outlet pipes - length 50m		3"
Outlet pipes - length 100m		3"

