

# BSC PWR 900/887/20



## FEATURES:

- Pre-installed battery container all-in-one solution – on a reduced footprint
- In-house power and control electronics – Perfectly optimised with maximum safety and efficiency
- State-of-the-art safety technology (monitoring / aerosol / smoke / heat / overpressure flap)
- Latest cell technology – Highest quality, durability and safety
- Scalable performance and capacity
- Energy-optimized air-air battery cooling system for higher efficiency
- High accessibility for user-friendly maintenance (max. once a year)
- 10-year performance warranty with a wide temperature range


### General technical data

Rated apparent power	kVA	900
Rated voltage	Vac	400
Frequency	Hz	50
Maximum AC current	A	1300
Battery cell	Type	Li-Ion (LFP) Prismatic
Total capacity	kWh	887
Rated net capacity (100%DoD)	kWh	887



### Inverter

Quantity	n.	10
Rated apparent power	kVA	90
Maximum AC current	A	130
Power factor / Range		1 / 0i ... 0c
Peak current (Ip)	A	320
Initial short circuit current (Ik'')	A	130

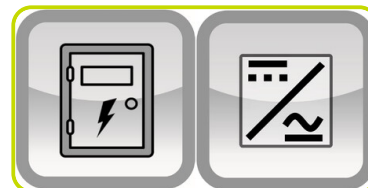

**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chişinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

## Battery

Quantity of module	n.	110
Module capacity	kWh	8.06
Rated Voltage	V	844.8
Max. C-rate		1C
Battery cell	Type	Li-Ion (LFP) Prismatic
Cycles @ 100% DoD   65% SoH	n.	7300



## Technical data - Energy Management System

Voltage supply	VDC	24
RJ45 dedicated MAC addresses for OT/IT use	n.	2
Encrypted MQTTS communication		✓
Digital cloud twin		✓
2-factor authentication		✓
Communication Interface Ethernet (Modbus TCP/IP / local and cloud-to-cloud REST API)		✓




## • Possible Applications

Self-consumption optimization (SCO)		✓
Peak shaving (PS)		✓
Time-based charging/discharging (ToU)		✓
Combined operation (multi-use e.g. PS and SCO)		✓
Energy trading		✓
Simple management of charging stations		✓
Load management and prioritisation for charging points		✓
Integration of Plant controllers		✓

## Installation data

Cooling capacity (Battery room)	kW	2x9
Heating capacity (Battery room)	kW	2x3
Forced air cooling (Inverter room)		✓
AC-Grid connection		3P, PE / TT, TN-C, TN-S
AC-Auxiliary grid connection		3P, N, PE / TT, TN-C-S
Communication Interfaces RJ45 (Ethernet)		✓
Dimensions	(L/W/H) mm	6.058x2.438x2.896
Max. permissible installation height	m	3000
Corrosion resistance		C3
Weight	kg	17.860
Pickup points	n.	4
Protection rating (battery room)	IP	54
Operating temperature range	°C	-20-50
Product warranty	Years	10
Performance warranty	Years	10

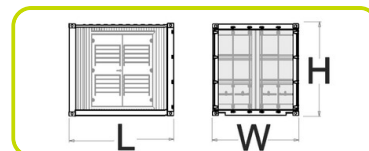

## Safety devices

Permanent monitoring of the battery cells		✓
Temperature and smoke sensor		✓
Pressure relief flap		✓
Aerosol Generator		✓



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chișinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md

## Certificates / Approvals

---

### Battery System

#### Modul:

UN38.3 / UL 9540A

**Battery System:** CE / UKCA / UN 38.3 / UN 3481 / IEC 62619 / UL 1973 / UL 9540A / VDE 2510-50 / IEC 61000-6-2 / IEC 61000-6-4

### Battery Inverter

#### EU- Directives:

2014/30/EU / 2014/35/EU / 2011/65/EU / 2015/863/EU

#### Safety Battery Inverter:

IEC 62109-1 / IEC 62109-2 / IEC 62477-1 / IEC 61439-1 / IEC 61439-2

#### EMC:

EN 61000-6-2 / EN 61000-6-4 / EN 61000-3-12 / EN 61000-3-11

#### Grid codes:

DIN VDE V 0126-1-1 / VDE AR-N 4105:2018 / VDE AR-N 4110:2023 / C10/C11 / G99/1-9 / TOR Stromerzeugungsanlagen Typ A/B / CEI 0-16, CEI 0-21 / EN 50549-1/-2 / AS4777.2 / NTS 631, UNE 27002



For other grid codes please contact your local sales representative

### Optional features

Optional Energy Meter Ethernet •

Optional Energy Meter RS485 •

Extension Kit 88.7 without Rack •



**ETOP**  
creat să reziste

Republica Moldova, MD-2023  
mun. Chișinău, str. Uzinelor 90  
+ /373/ 67 707 707  
office@etop.md  
www.etop.md