

Lui 460


More capacity, increased versatility.



The highest of the range, with a working height up to 6.6 m (21 ft 8 in), is designed to host up to two operators and combines compactness and greater performance, maintaining the unique maneuverability of the Leonardo HD .

Leonardo HD's simple design and components remain unchanged in order to ensure easy and intuitive maintenance.

Technical specifications

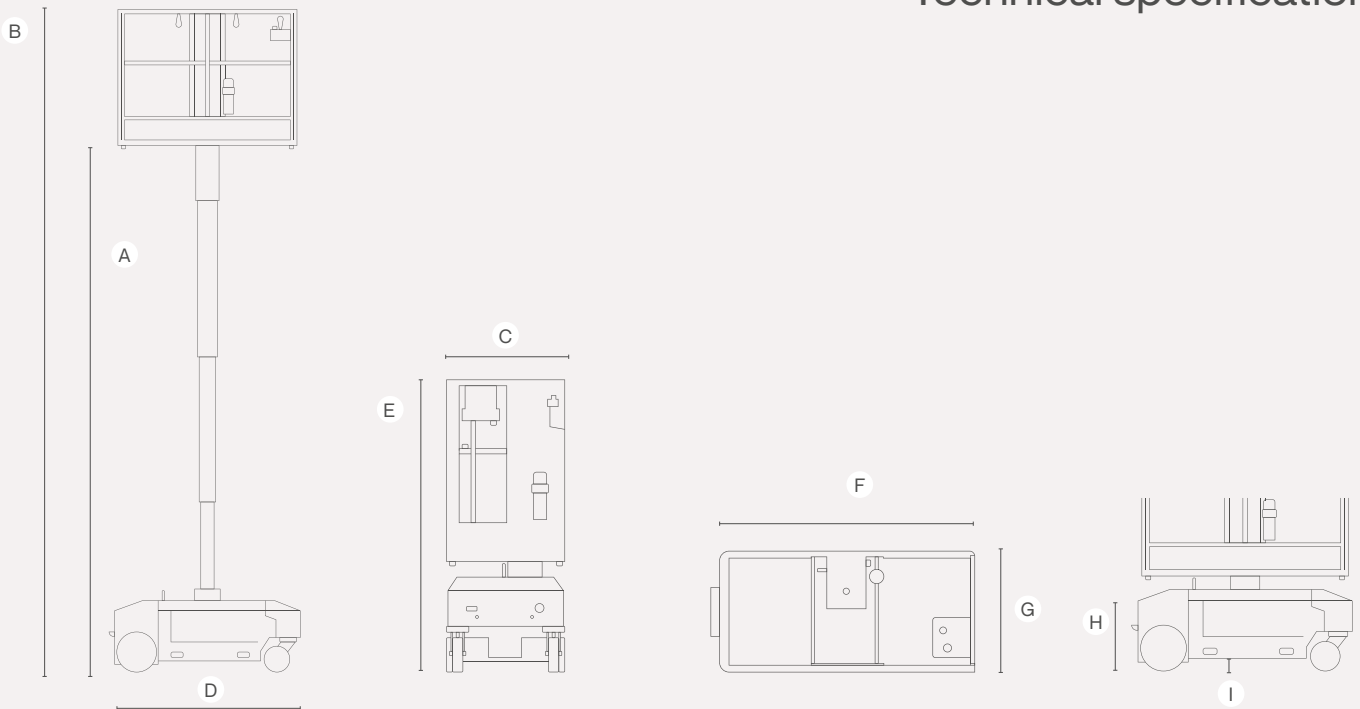

	METRIC	US
A Platform Height	4620 mm	15 ft 2 in
B Working Height	6620 mm	21 ft 8 in
C Width	760 mm	30 in
D Base Length	1600 mm	63 in
E Stowed Height	1850 mm	72.8 in
F Platform Length	1560 mm	61.4 in
Platform Length W/ decks ext.	2376 mm	7 ft 10 in
G Platform Width	680 mm	26.8 in
H Entry Step	340 mm	13.4 in
I Ground Clearance	65 mm	2.6 in
Platform Capacity	280 Kg	617 lbs
Unit Weight	1250 Kg	2755 lbs
Rated Number of Occupants (CE)	2	2
Drive Speed (Stowed)	3 Km/h	1.9 mph
Drive Speed (Raised)	0.6 Km/h	0.35 mph
Raise/Lower Speed	26/15 sec	26/15 sec
Inside Turning Radius	Zero	Zero
Outside Turning Radius	1590 mm	62.6 in
Gradeability	≤ 35% (-19°)	≤ 35% (-19°)
Maximum Tilt Angle (Raised)	1,5°	1,5°
Wind rating	Zero – indoor use only	Zero – indoor use only
Hydraulic System Capacity	12 lt	3.17 US gal
Power Source	110/220 V AC 24V DC	110/220 V AC 24V DC
AGM Batteries	n°4 - 6V ~ 240Ah@20h	n°4 - 6V ~ 240Ah@20h
Acid Lead Batteries	n°4 - 6V ~ 240Ah@20h	n°4 - 6V ~ 240Ah@20h