


VIBRATION RANGE

# VPA

## Electric engines for pendulum vibrators

The VPA series comprise electric motors to power up pendulum vibrators.

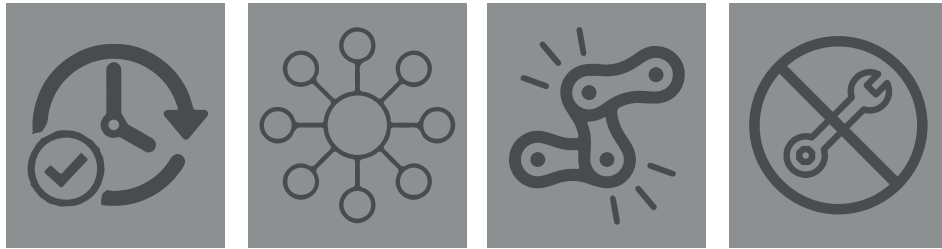

**+**  
**Durability**

Long life highly powerful and reliable motors.

**+**  
**Versatility**

The wide range comprises single-phase and three-phase motors.

**+**  
**Resistance**

The case protects the motor against impacts and external elements, and it is easy to clean against concrete splashes.

**+**  
**Zero maintenance**

It does not require spare parts or periodic reviews. Does not generate waste.

- Engine speed: 3,000 r.p.m.
- Machine weight: 12.1 Kg
- For 60Hz connection, please consult
- For different types of pins, please consult
- Three-phase motor provided with a clutch to prevent rotation in the opposite direction
- Three-phase motor supplied at 400V 3 ~ 50Hz (It can be supplied at 230V 3 ~ 50Hz upon request)
- Optional hexagonal coupling for single-phase models



### Technical Data

MODEL	Power (CV)	Tension (V)	Frequency (Hz)	Dimensions (mm) (LongxWidexHigh)
VPA D	1.5	400 3~	50	440x190x340
	1.5	230 3~	50	440x190x340
VPAM D	1.5	230 1~	50	440x190x340
VPAME D	1.5	115 1~	50	440x190x340