

E5000 RENTAL



A robust and economic generator designed to Rental intensive use. Ready to move where power is needed, configured with a strong and compact frame, complete with protections, hours meter and trasportation kit.

Main Features

Frequency	Hz	50
Voltage	V	230
Power factor	cos ϕ	0.9
Phase		1

Power Rating

Emergency Standby Power ESP	kVA	5.1
Emergency Standby Power ESP	kW	4.6
Continuous power COP	kVA	4.2
Continuous power COP	kW	3.9

Ratings definition (ISO-8528)

ESP - Emergency Standby Power:

It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

COP - Continuous Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously for an unlimited number of hours, with the maintenance intervals and procedure being carried out as prescribed by the manufacturers.



Engine specifications


Engine Brand		Honda
Model		GX270 Recoil
Engine cooling system		Air
Displacement	cm ³	270
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Recoil

Alternator Specifications

Alternator		NSM
Type		Brushless
Class		H
IP protection		23
Poles		2
Frequency	Hz	50
Voltage	V	230
Voltage regulation system		Capacitor
Voltage tolerance	% +5, - 10 (cosφ1)	

Dimensional data

Length	(L) mm	715
Width	(W) mm	835
Height	(H) mm	650
Fuel tank capacity	l	5.3

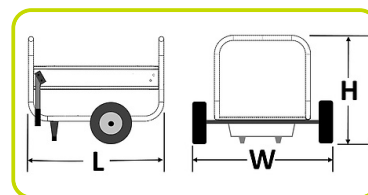

Autonomy

Fuel consumption at 75% of Load	l/h	1.67
Fuel consumption at 100% of Load	l/h	2.22
Running time at 75% of load	h	3.17
Running time at 100% of load	h	2.39

Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69



ETOP
creat să reziste

Republica Moldova, MD-2023
mun. Chişinău, str. Uzinelor 90
+ /373/ 67 707 707
office@etop.md
www.etop.md

GENSET CONTROL (ASCODIF)

COMMANDS:

- Selector switch: OFF - ON
- Starting systems: Recoil
- Fuel Cock



PROTECTIONS:

- Thermal protection
- Oil Guard
- Differential protection 30mA
- Magneto thermal protection
- Hour Meter

SOCKET TYPE

SCHUKO 230V 16A IP54

2

